



# THREAD MILLS - BSPP - SOLID CARBIDE (BRITISH STANDARD PIPE PARALLEL) FULL PROFILE

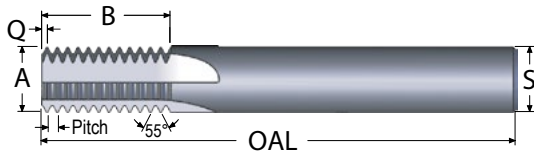

- ALTiN+ coating extends tool life
- Polished flute face for optimum performance

THREAD DIA / PITCH	"A" TOOL DIA.	"B" LENGTH OF CUT	"Q" LENGTH	"S" SHANK DIA.	OAL	FLUTES	ORDER #	
							UNCOATED	ALTiN+
							INTERNAL OR EXTERNAL THREADS	
1/8-28	0.245	0.657	0.016	0.250	2.50	4	TM245-28BSPP	TM245-28BSPP-A
1/4, 3/8-19	0.345	0.811	0.024	0.375	3.50	4	TM345-19BSPP	TM345-19BSPP-A
1/2, 3/4-14	0.450	1.100	0.034	0.500	3.50	4	TM450-14BSPP	TM450-14BSPP-A
1 to 6-11	0.620	1.125	0.040	0.625	3.50	5	TM620-11BSPP	TM620-11BSPP-A

# THREAD MILLS - BSPT - SOLID CARBIDE (BRITISH STANDARD PIPE TAPER) FULL PROFILE

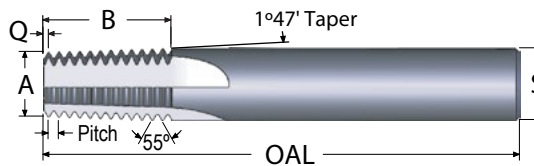

- ALTiN+ coated for improved surface finish
- Made with premium submicron grade carbide

THREAD DIA. / PITCH	"A" TOOL DIA.	"B" LENGTH OF CUT	"Q" LENGTH	"S" SHANK DIA.	OAL	FLUTES	ORDER #	
							UNCOATED	ALTiN+
							INTERNAL OR EXTERNAL THREADS	
1/8-28	0.215	0.550	0.017	0.250	2.50	4	TM215-28BSPT	TM215-28BSPT-A
1/4, 3/8-19	0.335	0.650	0.025	0.375	3.50	4	TM335-19BSPT	TM335-19BSPT-A
1/2, 3/4-14	0.430	1.100	0.035	0.500	3.50	4	TM430-14BSPT	TM430-14BSPT-A
1 to 6-11	0.550	1.127	0.045	0.625	3.50	5	TM550-11BSPT	TM550-11BSPT-A