



THE LEXAN® FLEX-SHIELD™

Protects Your Eyes Against Chip & Liquid Burns.
Safety Shield on Flexbar® Universal Positioning Arm. Quick Cam Action Locking (Shield swivels 360° and locks positively where placed).

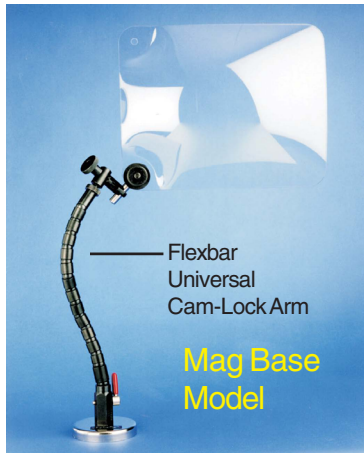

Now Available in Mag Base, "C" Clamp and Base Mount Models.

- Overall height of Flexbar Stand: 14"
- Super Power Disc Mag Base: 3.16" dia.
- C-Clamp Capacity: 1 3/8", Throat to center of screw 11/16"
- Base Mount for permanent mounting on machine
- Shields made of durable clear view Lexan - 1/8" thick
- Choice of concave or flat

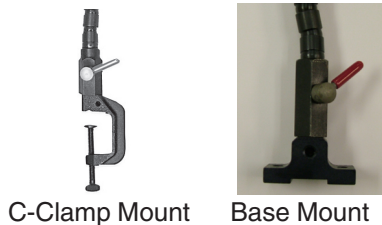


CONCAVE SHIELD MODELS-Complete			
Shield Size	Mag Base Model	C-Clamp Model	Base Mount Model
6" x 8"	13313	13313-C	13313-B
8" x 10"	13314	13314-C	13314-B
10" x 12"	13315	13315-C	13315-B

FLAT SHIELD MODELS-Complete			
Shield Size	Mag Base Model	C-Clamp Model	Base Mount Model
6" x 8"	13316	13316-C	13316-B
8" x 10"	13317	13317-C	13317-B
10" x 12"	13318	13318-C	13318-B

LEXAN® REPLACEMENT SHIELDS - Carton of 3			
CONCAVE		FLAT	
13093-L	6" x 8"	13120-L	6" x 8"
13094-L	8" x 10"	13121-L	8" x 10"
13095-L	10" x 12"	13122-L	10" x 12"

CHIPGUARD™ DEFLECTORS

with Polycarbonate Shields Made of Lexan® (3/16" thick)

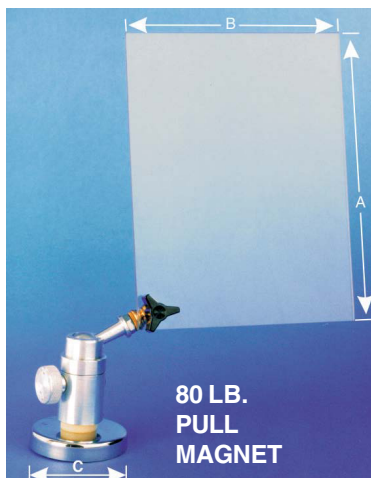

- Swivel Base Positioner affords incredible variety of shield positioning instantly. Shield swivels 360 degrees in two planes and 180 degrees in 3rd plane. A small twist on locking knob positively locks all.
- Cantilever Design - leaves room for shield to cover work area.

Model No.	On Magnetic Base		
	A	B	C
13010	4"	6"	2 5/8" dia.
13011	6"	8"	2 5/8" dia.
13012	8"	12"	2 5/8" dia.

SPARE SHIELDS AVAILABLE UPON REQUEST