

Add prefix FLEX. when ordering


FLEXIGUARD

Curved Plastic Shields On Rugged Flexible Goosenecks

- Positively deflects chips and coolant.
- Permits clear & closer visual inspection of work.



2 MODELS



1. ON C-CLAMP: Permits clamping of safety shield on hard-to-affix locations whether flat, round, etc. Made of malleable iron with 120° vee. Clamp capacity - 1³/₈". Throat to center of screw - 1¹/₁₆". Length of flex arm with C-Clamp - 13 1/2".

2. ON MAGNETIC BASE: Disc-type magnet - 85 lbs. pull. Length of flex arm with magnet - 10". Shield swivels and locks 360°.

MODEL NO.	SHIELD SIZE
13001	7 1/2" x 10"
13002	10" x 12"
13003	12" x 16"

MODEL NO.	SHIELD SIZE	SIZE OF MAGNET
13004	7 1/2" X 10"	2.65" diameter
13005	10" X 12"	2.65" diameter
13006	12" X 16"	3.16" diameter

REPLACEMENT SHIELDS

MODEL NO.	SIZE
13007	CTN. OF 3 7 1/2" x 10"
13008	CTN. OF 3 10" x 12"
13009	CTN. OF 3 12" x 16"
13140	1 SHIELD 7 1/2" x 10"
13141	1 SHIELD 10" x 12"
13142	1 SHIELD 12" x 16"

REPLACEMENT PARTS (SHIELD NOT INCLUDED)

	NO.
FLEXIGUARD ARM ON C-CLAMP	13137
FLEXIGUARD ARM ON 2.65" DIA. MAGNET	13138
FLEXIGUARD ARM ON 3.16" DIA. MAGNET	13139

HELICAL METAL LEADSCREW COVERS


INCREASE OPERATOR SAFETY BY COVERING LEAD SCREWS, RODS AND DIE POSTS

Covers are the perfect shield for meeting safety requirements on Hydraulic Rods, Lead Screws and Die Posts by eliminating pinch points. These simple helical metal coils surround and protect sensitive cylindrical mechanisms with overlapping coils that seal out dirt, chips, and contaminants. The spring action memory holds the unit in place as it expands and compresses between two parallel surfaces. So efficient are these COVERS, especially in harsh environments, that most users report they outlast bellows types by as much as 20 to 1! This results in reduced capital equipment replacement costs, as well as in added productivity through the elimination of more frequent installation associated with less durable shielding devices.



Now Also Available: **OPEN WOUND METAL LEADSCREW COVERS**

No need to disassemble equipment, just wind on cover and install split pilot and retainer.

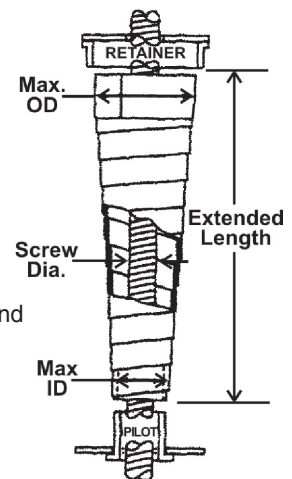

Complete range of standard and custom spring covers and retaining collars available per quotation. Please contact us for specifications/quotation request sheet.