




PRIMA - KEY TYPE DRILL CHUCKS

Key-type drill chucks with key, DIN 6349
With taper mounting respectively thread mounting
impact resistant. For drills with higher frequency we
recommend key-type drill chuck Prima-Mat.

Heavy industry version for
stationary drilling and
hand-operated percussion
drilling machines

* Smaller, intermediate sizes
primarily for hand-operated
percussion drilling machines

** With thru hole for right and left hand rotation

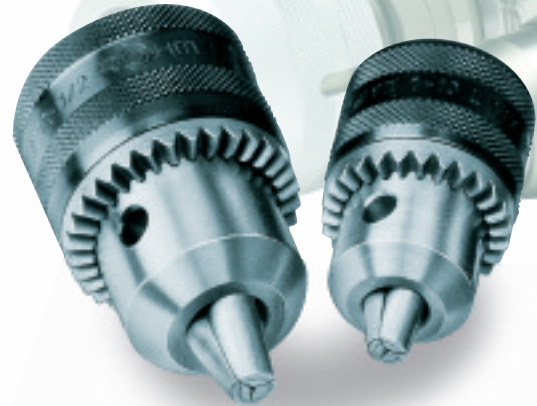

PRIMA KEY TYPE DRILL CHUCKS

Rohm Id. Nr.	Capacity (Inches)	Mount	Chuck Key	O. D. mm	Opened Length (mm)	Closed Length (mm)	Code No.	Price \$
072806	1/64-5/32	B10	S1	24	39	47.5	390-005	
072807	1/64-5/32	J0	S1	24	34	42.5	390-015	
245586*	1/64-1/4	B10	S1	29.5	43	53	390-020	
072811*	1/64-1/4	3/8"-24	S1	29.5	42.5	53	390-025	
245548	1/64-1/4	B12	S1	29.5	47.5	57.5	390-030	
072810	1/64-1/4	JT1	S1	29.5	42.5	52.5	390-035	
245485*	1/64-5/16	B10	S1	29.5	43	53	390-040	
245550*	1/64-5/16	B12	S1	29.5	47.5	57.5	390-045	
245552*	1/64-5/16	3/8"-24	S1	29.5	42.5	53	390-050	
245553*	1/64-5/16	1/2"-20	S1	29.5	45	55.5	390-060	
072656	1/64-5/16	JT1	S2A	34.5	48	58.5	390-065	
072631	1/64-5/16	1/2"-20	S2A	34.5	49.5	61	390-055	
072653*	1/32-3/8	B12	S2	34.5	50	60.5	390-070	
070679*	1/32-3/8	3/8"-24	S2	34.5	49.5	61	390-075	
072614*	1/32-3/8	1/2"-20	S2	34.5	49.5	61	390-080	
317255**	1/32-3/8	3/8"-24	S2	34.5	49.5	61	390-085	
317256**	1/32-3/8	1/2"-20	S2	34.5	49.5	61	390-090	
218555*	1/32-3/8	B12	S2	37	50	60.5	390-095	
072687	1/32-3/8	B16	S2	42.8	63	77	390-100	
072693	1/32-3/8	JT2	S2	42.8	59	75.5	390-105	
208881	1/32-3/8	3/8"-24	S2	42.8	59	74	390-120	
064524	1/32-3/8	1/2"-20	S2	42.8	59	74	390-115	
072897*	1/16-1/2	B12	S2	42.8	58	72	390-150	
072800*	1/16-1/2	B16	S2	42.8	63	77	390-155	
064527*	1/16-1/2	3/8"-24	S2	42.8	59	74	390-125	
064530*	1/16-1/2	1/2"-20	S2	42.8	59	74	390-130	
**	1/16-1/2	3/8"-24	S2	42.8	59	74	390-135	
**	1/16-1/2	1/2"-20	S2	42.8	59	74	390-140	
072815*	1/32-1/2	B16	S3	52	67.5	86	390-145	
072817*	1/32-1/2	JT2	S3	52	67.5	86	390-160	
072818*	1/32-1/2	JT6	S3	52	67.5	86	390-165	
072819*	1/32-1/2	JT33	S3	52	67.5	86	390-170	
072820*	1/32-1/2	5/8"-16	S3	52	68.5	87.5	390-175	
	1/32-1/2	M14 x 2	S3	52	68.5	87.5	390-180	
227152	1/8-5/8	B16	S3	50	67.5	86.5	390-185	
072866	1/8-5/8	1/2"-20	S3	50	68.5	87.5	390-190	
072825	1/32-5/8	B18	S3	56.5	79	98	390-195	
072827	1/32-5/8	JT3	S3	56.5	79	98	390-200	
072828	1/32-5/8	JT6	S3	56.5	79	98	390-205	
	1/32-5/8	JT33	S3	56.5	79	98	390-210	
072829	1/32-5/8	5/8"-16	S3	56.5	80	100.5	390-215	
072831	3/16-3/4	B22	S4	65	92.5	113.5	390-225	
072833	3/16-3/4	JT3	S4	65	82.5	103.5	390-230	
072834	3/16-1-1/32	B24	S4	80	120	147	390-240	