


THREAD MILLS - EXJ - SOLID CARBIDE (EXTERNAL UNJ THREAD) FULL PROFILE

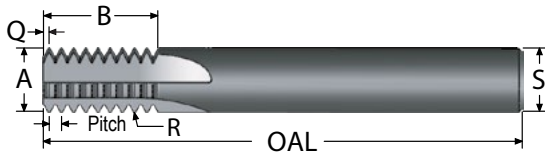

- ALTiN+ coating extends tool life
- Precision ground for maximum concentricity
- Made with premium submicron carbide

EXT. THREAD / PITCH	"A" TOOL DIA.	"B" LENGTH OF CUT	"R" ROOT RADIUS	"Q" LENGTH	"S" SHANK DIA.	OAL	FLUTES	ORDER #	
								UNCOATED	ALTiN+
								EXTERNAL THREADS ONLY	
UNJ-32	0.245	0.668	0.0051	0.016	0.250	2.50	4	TM245-32EXJ	TM245-32EXJ-A
UNJ-28	0.245	0.657	0.0059	0.018	0.250	2.50	4	TM245-28EXJ	TM245-28EXJ-A
UNJ-24	0.245	0.683	0.0069	0.020	0.250	2.50	4	TM245-24EXJ	TM245-24EXJ-A
UNJ-20	0.370	0.773	0.0082	0.024	0.375	3.50	5	TM370-20EXJ	TM370-20EXJ-A
UNJ-18	0.370	0.800	0.0091	0.026	0.375	3.50	5	TM370-18EXJ	TM370-18EXJ-A
UNJ-16	0.370	0.774	0.0103	0.029	0.375	3.50	5	TM370-16EXJ	TM370-16EXJ-A
UNJ-14	0.495	1.027	0.0118	0.033	0.500	3.50	6	TM495-14EXJ	TM495-14EXJ-A
UNJ-12	0.495	1.031	0.0137	0.038	0.500	3.50	6	TM495-12EXJ	TM495-12EXJ-A
UNJ-10	0.495	1.037	0.0165	0.046	0.500	3.50	6	TM495-10EXJ	TM495-10EXJ-A
UNJ-8	0.495	1.046	0.0207	0.057	0.500	3.50	6	TM495-8EXJ	TM495-8EXJ-A

THREAD MILLS
UN

SINGLE POINT

INDEXABLE TOOLS

PORT - CAVITY

SPECIALTY